


# Graphic Label 1.6”

2.4Ghz: (B/W)ESLGM016XX000, (B/W/R)ESLGR016XX000, (B/W/Y)ESLGY016XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

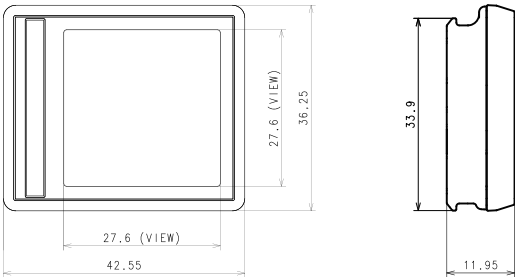

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                               |
|------------------------|---------|--------------------------------------------------------------|
| Outer Dimension        | mm/inch | 36.25 x 42.55 x 11.95 mm / 1.42 x 1.67 x 0.47 inch           |
| Weight                 | g       | 18.5                                                         |
| Case Color             | -       | White, Black and other color is available                    |
| Display Technology     | -       | Full graphic E-Ink Display                                   |
| Active Display Area    | mm/inch | 27.60 x 27.60 mm / 1.08 x 1.08 inch                          |
| Display Resolution     | Pixel   | 184 dpi (200 x 200) – Mono / 140dpi (152 x 152) – Color      |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                            |
| Battery                | -       | CR2450 * 1EA                                                 |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (1 updates/Day)                   |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                         |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                    |
| Wireless Connectivity  | -       | NFC                                                          |
| Multi-page             | -       | Up to 3 pages                                                |




# Graphic Label 2.2”

2.4Ghz: (B/W)ESLGM022XX000, (B/W/R)ESLGR022XX000, (B/W/Y)ESLGY022XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

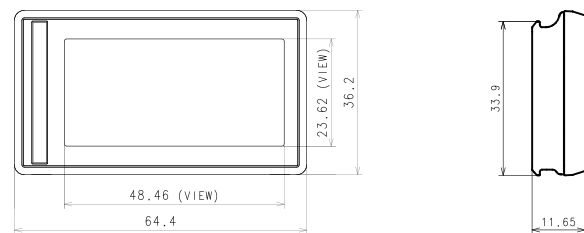

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                               |
|------------------------|---------|--------------------------------------------------------------|
| Outer Dimension        | mm/inch | 64.40 x 36.20 x 11.65 mm / 2.53 x 1.42 x 0.45 inch           |
| Weight                 | g       | 29.0                                                         |
| Case Color             | -       | White, Black and other color is available                    |
| Display Technology     | -       | Full graphic E-Ink Display                                   |
| Active Display Area    | mm/inch | 48.46 x 23.62 mm / 1.90 x 0.92 inch                          |
| Display Resolution     | Pixel   | 111 dpi (212 x 104)                                          |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                            |
| Battery                | -       | CR2450 * 2EA                                                 |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)                   |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                         |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                    |
| Wireless Connectivity  | -       | NFC                                                          |
| Multi-page             | -       | Up to 3 pages                                                |




# Graphic Label 2.6”

2.4Ghz: (B/W)ESLGM026XX000, (B/W/R)ESLGR026XX000

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

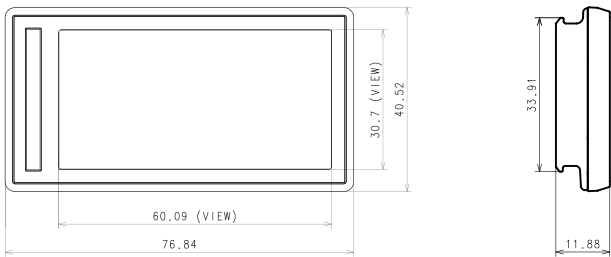

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                          |
|------------------------|---------|---------------------------------------------------------|
| Outer Dimension        | mm/inch | 76.84 x 40.52 x 11.88 mm / 3.02 x 1.59 x 0.46 inch      |
| Weight                 | g       | 34.9                                                    |
| Case Color             | -       | White, Black and other color is available               |
| Display Technology     | -       | Full graphic E-Ink Display                              |
| Active Display Area    | mm/inch | 60.09 x 30.70 mm / 2.36 x 1.20 inch                     |
| Display Resolution     | Pixel   | 125 dpi (296 x 152)                                     |
| Display Color          | -       | B/W, B/W/R                                              |
| Battery                | -       | CR2450 * 2EA                                            |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)              |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                    |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                               |
| Wireless Connectivity  | -       | NFC                                                     |
| Multi-page             | -       | Up to 3 pages                                           |




# Graphic Label 2.9”

2.4Ghz: (B/W)ESLGM029XX000, (B/W/R)ESLGR029XX000, (B/W/Y)ESLGY029XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

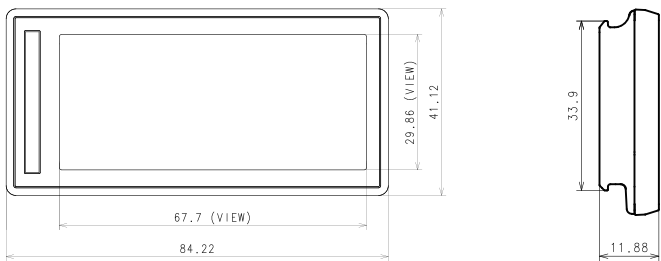

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                               |
|------------------------|---------|--------------------------------------------------------------|
| Outer Dimension        | mm/inch | 84.22 x 41.12 x 11.88 mm / 3.31 x 1.61 x 0.46 inch           |
| Weight                 | g       | 37.9                                                         |
| Case Color             | -       | White, Black and other color is available                    |
| Display Technology     | -       | Full graphic E-Ink Display                                   |
| Active Display Area    | mm/inch | 67.70 x 29.86 mm / 2.66 x 1.17 inch                          |
| Display Resolution     | Pixel   | 112 dpi (296 x 128)                                          |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                            |
| Battery                | -       | CR2450 * 2EA                                                 |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)                   |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                         |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                    |
| Wireless Connectivity  | -       | NFC                                                          |
| Multi-page             | -       | Up to 3 pages                                                |




# Graphic Label 2.9” (real-time)

2.4Ghz: (B/W)TGXGM029XX00N, (B/W/R)TGXGR029XX00N, (B/W/Y)TGXGY029XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

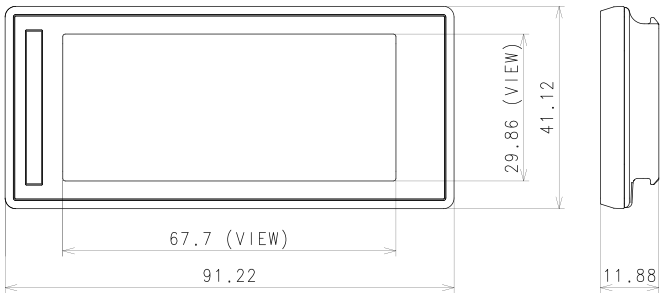

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                               |
|------------------------|---------|--------------------------------------------------------------|
| Outer Dimension        | mm/inch | 91.22 x 41.12 x 11.88 mm / 3.59 x 1.61 x 0.46 inch           |
| Weight                 | g       | 37.9                                                         |
| Case Color             | -       | White, Black and other color is available                    |
| Display Technology     | -       | Full graphic E-Ink Display                                   |
| Active Display Area    | mm/inch | 67.70 x 29.86 mm / 2.66 x 1.17 inch                          |
| Display Resolution     | Pixel   | 112 dpi (296 x 128)                                          |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                            |
| Battery                | -       | CR2450 * 2EA                                                 |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)                   |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                         |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                    |
| Wireless Connectivity  | -       | NFC                                                          |
| Multi-page             | -       | Up to 3 pages                                                |




# Graphic Label 4.2”

2.4Ghz: (B/W)ESLGM042XX00N2, (B/W/R)ESLGR042XX00N2

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

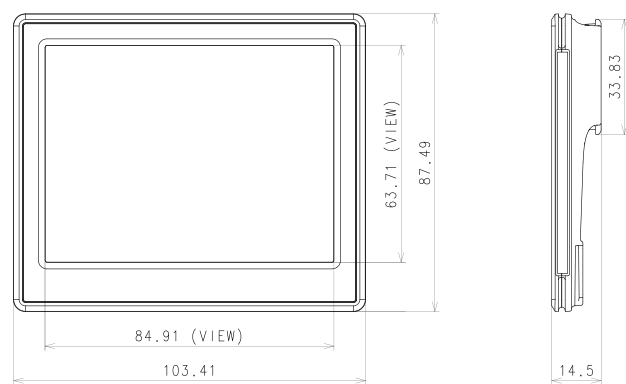

## TECHNICAL DETAILS


| Parameter              | Unit    | Specifications                                          |
|------------------------|---------|---------------------------------------------------------|
| Outer Dimension        | mm/inch | 103.41 x 87.49 x 14.50 mm / 4.07 x 3.44 x 0.57 inch     |
| Weight                 | g       | 75.0                                                    |
| Case Color             | -       | White, Black and other color is available               |
| Display Technology     | -       | Full graphic E-Ink Display                              |
| Active Display Area    | mm/inch | 84.91 x 63.71 mm / 3.34 x 2.50 inch                     |
| Display Resolution     | Pixel   | 120 dpi (400 x 300)                                     |
| Display Color          | -       | B/W, B/W/R                                              |
| Battery                | -       | CR2450 * 2EA                                            |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)              |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                    |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                               |
| Wireless Connectivity  | -       | NFC                                                     |
| Multi-page             | -       | Up to 3 pages                                           |




# Graphic Label 4.2” (real-time)

2.4Ghz: (B/W)TGXGM042XX00N, (B/W/R)TGXGR042XX00N, (B/W/Y)TGXGY042XX00N

## EXEMPLARY PICTURE

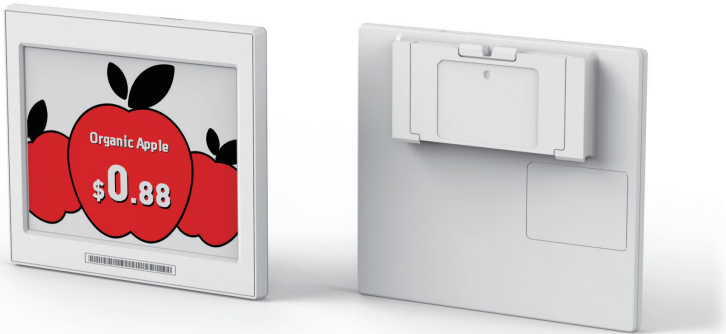

## MECHANICAL DRAWINGS

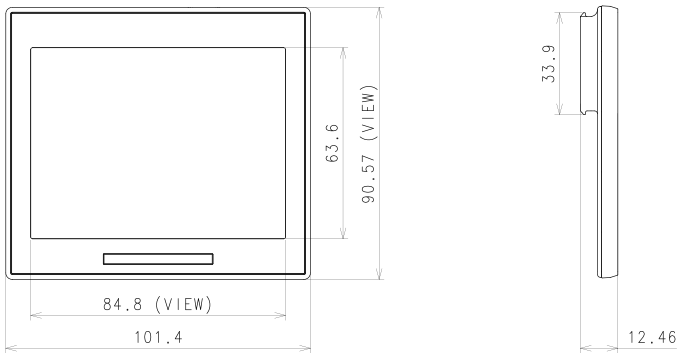

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                               |
|------------------------|---------|--------------------------------------------------------------|
| Outer Dimension        | mm/inch | 101.40 x 90.57 x 12.46 mm / 3.99 x 3.56 x 0.49 inch          |
| Weight                 | g       | 75.0                                                         |
| Case Color             | -       | White, Black and other color is available                    |
| Display Technology     | -       | Full graphic E-Ink Display                                   |
| Active Display Area    | mm/inch | 84.80 x 63.60 mm / 3.33 x 2.50 inch                          |
| Display Resolution     | Pixel   | 120 dpi (400 x 300)                                          |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                            |
| Battery                | -       | CR2450 * 2EA                                                 |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)                   |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz & Sub-Giga (900MHz/862MHz)              |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR, BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                    |
| Wireless Connectivity  | -       | NFC                                                          |
| Multi-page             | -       | Up to 3 pages                                                |




# Graphic Label 4.3”

2.4Ghz: (B/W/R)ESLGR043XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

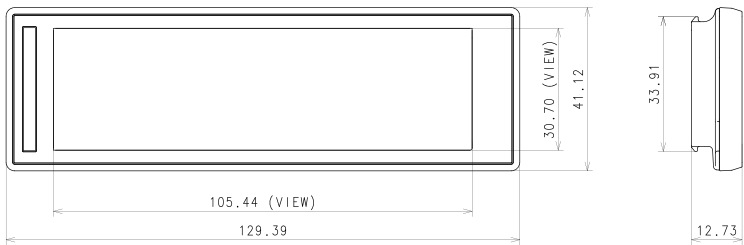

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                      |
|------------------------|---------|-----------------------------------------------------|
| Outer Dimension        | mm/inch | 129.39 x 41.12 x 12.73 mm / 5.09 x 1.61 x 0.50 inch |
| Weight                 | g       | 59.0                                                |
| Case Color             | -       | White, Black and other color is available           |
| Display Technology     | -       | Full graphic E-Ink Display                          |
| Active Display Area    | mm/inch | 105.44 x 30.70 mm / 4.15 x 1.20 inch                |
| Display Resolution     | Pixel   | 125 dpi (522 x 152)                                 |
| Display Color          | -       | B/W/R                                               |
| Battery                | -       | CR2450 * 2EA                                        |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)          |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                |
| Operating Temperature  | °C/°F   | 0 ~ 30°C (32 ~ 86°F)                                |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                           |
| Wireless Connectivity  | -       | NFC                                                 |
| Multi-page             | -       | Up to 3 pages                                       |




# Graphic Label 6.0”

2.4Ghz: (B/W)TGXGM069XX00N, (B/W/R)TGXGR060XX00N, (B/W/Y)TGXGY060XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

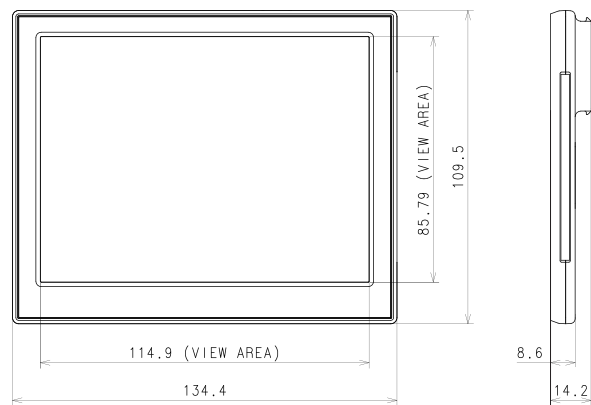

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                                                        |
|------------------------|---------|---------------------------------------------------------------------------------------|
| Outer Dimension        | mm/inch | 134.4 x 109.5 x 14.20 mm / 5.29 x 4.31 x 0.55 inch                                    |
| Weight                 | g       | 143.5                                                                                 |
| Case Color             | -       | White, Black and other color is available                                             |
| Display Technology     | -       | Full graphic E-Ink Display                                                            |
| Active Display Area    | mm/inch | 114.9 x 85.79 mm / 4.52 x 3.37 inch                                                   |
| Display Resolution     | Pixel   | 128 dpi (600 x 448)                                                                   |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                                                     |
| Battery                | -       | CR2450 * 4EA                                                                          |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)                                            |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz & Sub-Giga (900MHz/862MHz)                                       |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR / 10 ~ 30°C (50 ~ 86°F) - BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                                             |
| Wireless Connectivity  | -       | NFC                                                                                   |
| Multi-page             | -       | Up to 3 pages                                                                         |




# Graphic Label 7.5”

2.4Ghz: (B/W)TGXGM075XX00N, (B/W/R)TGXGR075XX00N, (B/W/Y)TGXGY075XX00N

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

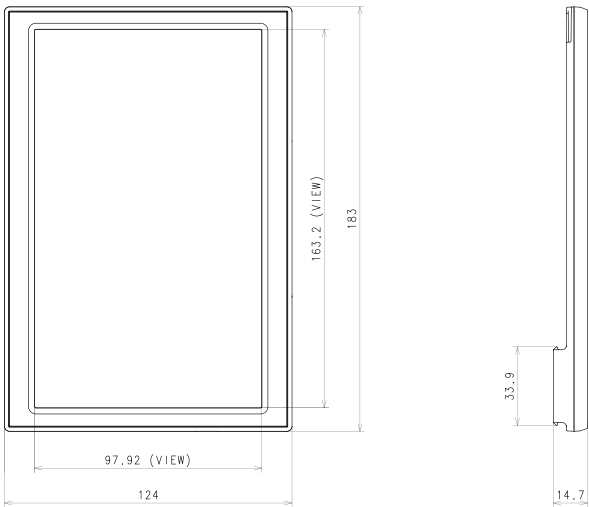

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                                                        |
|------------------------|---------|---------------------------------------------------------------------------------------|
| Outer Dimension        | mm/inch | 183 x 124 x 14.7 mm / 7.20 x 4.88 x 0.57 inch                                         |
| Weight                 | g       | 223.0                                                                                 |
| Case Color             | -       | White, Black and other color is available                                             |
| Display Technology     | -       | Full graphic E-Ink Display                                                            |
| Active Display Area    | mm/inch | 163.2 x 97.92 mm / 6.42 x 3.85 inch                                                   |
| Display Resolution     | Pixel   | 100 dpi (640 x 384) / 137 dpi (880 x 528)                                             |
| Display Color          | -       | B/W, B/W/R, B/W/Y                                                                     |
| Battery                | -       | CR2450 * 4EA                                                                          |
| Estimated Battery Life | Year    | 5 Years @ Room Temperature (2 updates/Day)                                            |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz & Sub-Giga (900MHz/862MHz)                                       |
| Operating Temperature  | °C/°F   | 0 ~ 40°C (32 ~ 104°F) - BW / 0 ~ 30°C (32 ~ 86°F) - BWR / 10 ~ 30°C (50 ~ 86°F) - BWY |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                                                             |
| Wireless Connectivity  | -       | NFC                                                                                   |
| Multi-page             | -       | Up to 3 pages                                                                         |




# Graphic Label 11.6”

2.4Ghz: (B/W/R)EL116C2WRN/WWW

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

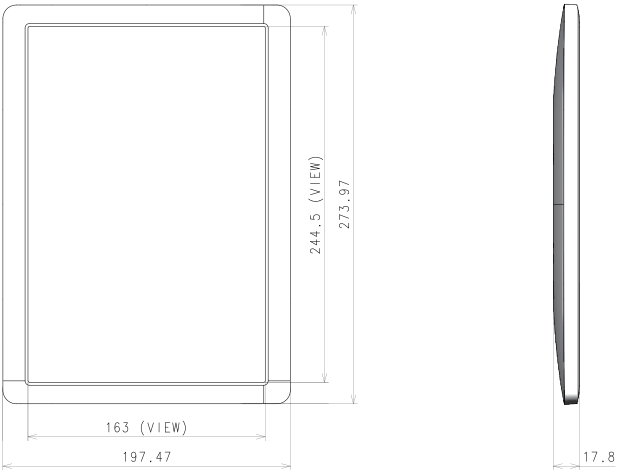

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                       |
|------------------------|---------|------------------------------------------------------|
| Outer Dimension        | mm/inch | 273.97 × 197.47 × 17.8 mm / 10.78 x 7.77 x 0.70 inch |
| Weight                 | g       | 434.0                                                |
| Case Color             | -       | White, Black and other color is available            |
| Display Technology     | -       | Full graphic E-Ink Display                           |
| Active Display Area    | mm/inch | 244.5 x 163 mm / 9.62 x 6.41 inch                    |
| Display Resolution     | Pixel   | 100 dpi (640 x 960)                                  |
| Display Color          | -       | B/W/R                                                |
| Battery                | -       | AAA * 4EA                                            |
| Estimated Battery Life | Year    | 3 Years @ Room Temperature (2 updates/Day)           |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                                 |
| Operating Temperature  | °C/°F   | 0 ~ 30°C (32 ~ 86°F)                                 |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                            |
| Wireless Connectivity  | -       | NFC                                                  |
| Multi-page             | -       | Up to 3 pages                                        |

*SOLU M*


# Graphic Label 13.3”

2.4Ghz: (B/W/R)EL133C2WRN/WWW

## EXEMPLARY PICTURE



## MECHANICAL DRAWINGS

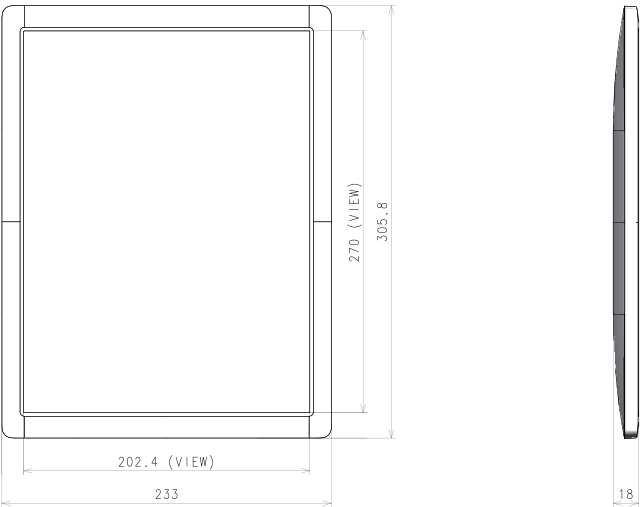

## TECHNICAL DETAILS

| Parameter              | Unit    | Specifications                                 |
|------------------------|---------|------------------------------------------------|
| Outer Dimension        | mm/inch | 305.8 × 233 × 18 mm / 12.03 x 9.17 x 0.70 inch |
| Weight                 | g       | 698.0                                          |
| Case Color             | -       | White, Black and other color is available      |
| Display Technology     | -       | Full graphic E-Ink Display                     |
| Active Display Area    | mm/inch | 270 x 202.4 mm / 10.62 x 7.96 inch             |
| Display Resolution     | Pixel   | 150 dpi (1600 x 1200)                          |
| Display Color          | -       | B/W/R                                          |
| Battery                | -       | AAA * 4EA                                      |
| Estimated Battery Life | Year    | 1.5 Years @ Room Temperature (1 updates/Day)   |
| Communication Protocol | -       | IEEE802.15.4, 2.4GHz                           |
| Operating Temperature  | °C/°F   | 0 ~ 30°C (32 ~ 86°F)                           |
| Storage Temperature    | °C/°F   | -23 ~ 40°C (-9.4 ~ 104°F)                      |
| Wireless Connectivity  | -       | NFC                                            |
| Multi-page             | -       | Up to 3 pages                                  |

